

SUPERAGI

AGENTSPEAK TOOLKIT


Before the advent of LLMs and LLM-based agents, there was much prior work on autonomous agency.

We felt it important not to neglect, but to instead incorporate, the preexisting research into autonomy.

Some features that I observed were lacking (when first hearing about and then tinkering with LLM-based autonomous agents):

- Sophisticated Control Flow / Event Loops
- Task Convergence
- Repeatability / Reproducibility
- Verification / Formal Methods
- Sensing or Acting
- Declarative Programming

Example: Early Agent Control Flow:

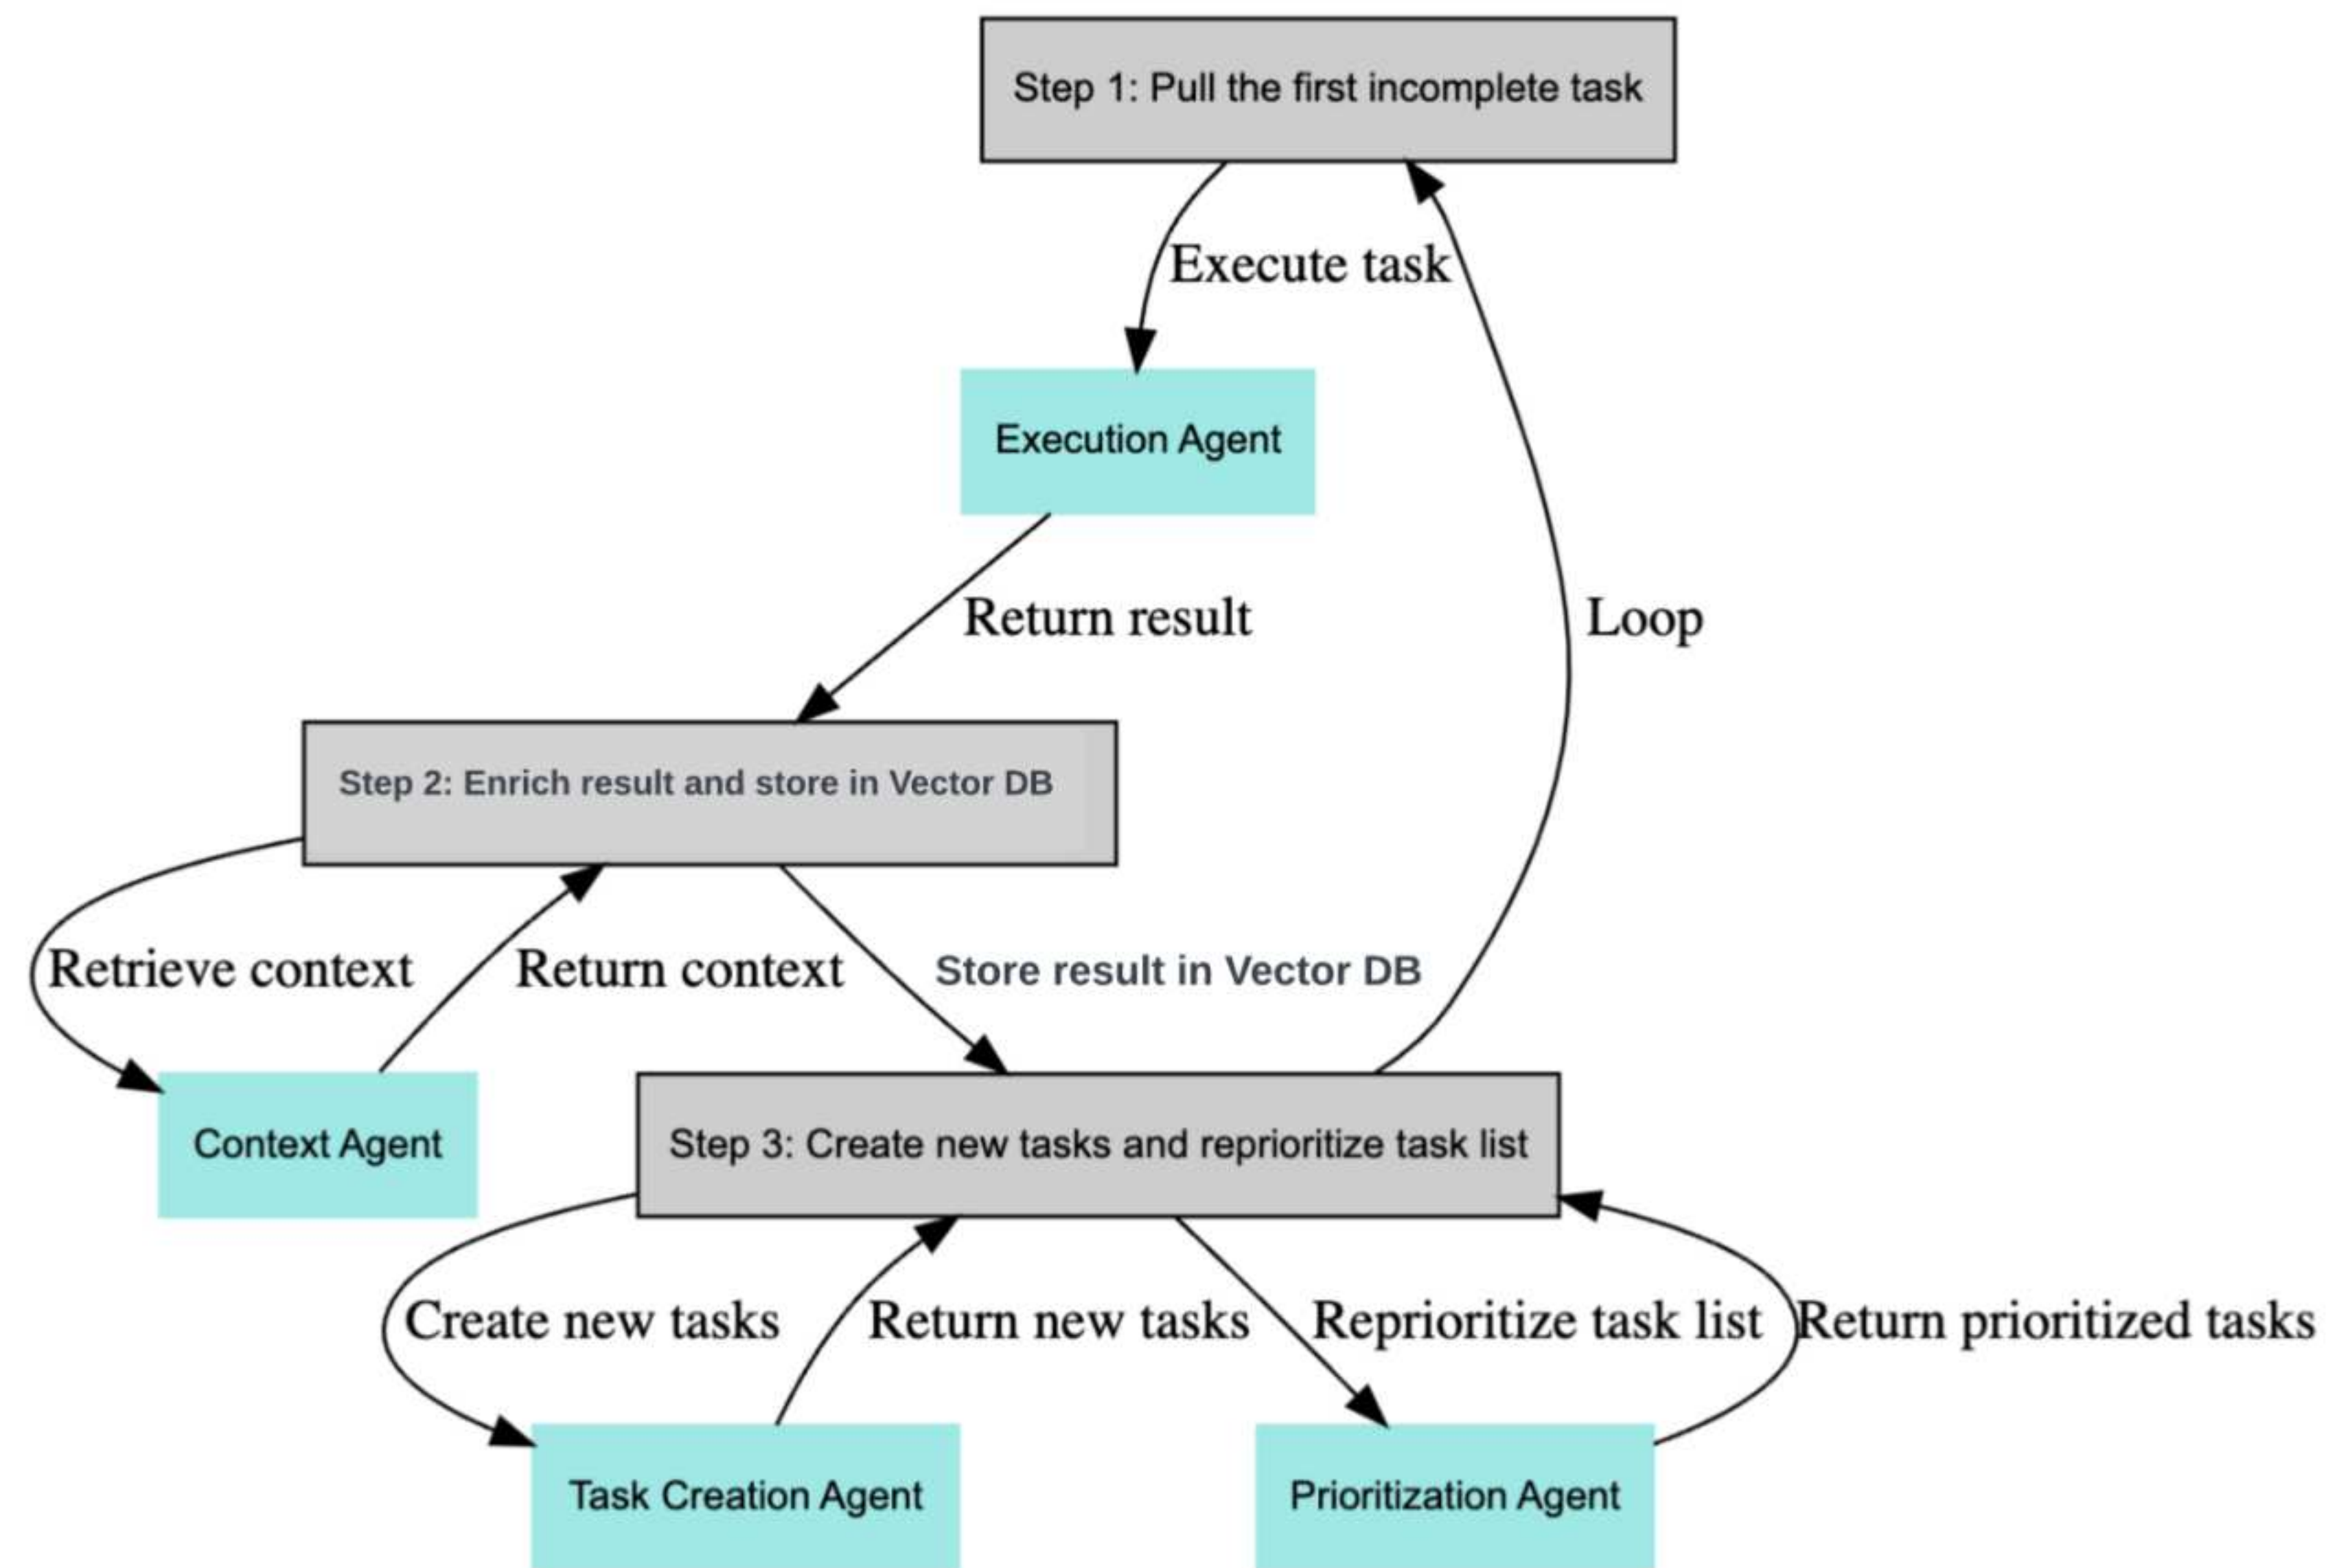

We need something that can provide:

- Adherence: pin down the agent to keep it on task.
- Completeness: ensure that it doesn't drop the ball on any tasks.
- Versatility: allow developers more control over the agents.
 - for use cases like our DeployGPT system.
- Explainability: allow a formal representation.

AgentSpeak is a great language for reasoning with beliefs, desires and intentions.

It is great at adding and removing goals at run time, which a lot of planning technologies lack (like PDDL).

The Judgement by Gustave Moreau (1865)
Oil on canvas, 204 x 115.5 cm.
Musée d'Orsay, Paris.
© Photo RMN. Photograph by
Hervé Lewandowski

Jason

a Java-based interpreter for an extended version of AgentSpeak

[Home](#) [Description](#) [Documents](#) [Examples](#) [Demos](#) [Teaching](#) [Projects](#)

The logo for Jason Agent Programming, featuring a classical-style head of a woman and the text "Jason Agent Programming".

About Jason

Jason is an interpreter for an extended version of AgentSpeak. It implements the operational semantics of that language, and provides a platform for the development of multi-agent systems, with many user-customisable features. **Jason** is available Open Source, and is distributed under GNU LGPL. See more in the [Description](#) page.

Links

- Jason on [Github](#) (latest code);
- Jason on [Sourceforge](#);
- [Screenshots](#).

Authors

Jason is developed by [Jomi F. Hübner](#) and [Rafael H. Bordini](#), based on previous work done with many colleagues, in particular Michael Fisher, Joyce Martins, Álvaro Moreira, Renata Vieira, Willem Visser, Mike Wooldridge, but also many others, as acknowledged in the manual (see the [Documents](#) page).

Download the latest version of Jason!

DOWNLOAD

Read the tutorial for installing Jason as an Eclipse plug-in!

ECLIPSE PLUG-IN

News

11/11/2019
Jason agents can also publish/subscribe to ROS topics using ROS Bridge. Check it out [here](#).

17/10/2019
[The Multi-Agent Programming Contest 2019](#) had two teams using **Jason**:

- **1st place:** LFC (using [JaCaMo](#))
- **4th place:** TRG


Watch replays of the matches and

“Jason is an interpreter for an extended version of AgentSpeak. It implements the operational semantics of that language, and provides a platform for the development of multi-agent systems, with many user-customizable features.”

WILEY SERIES IN AGENT TECHNOLOGY

WILEY

programming multi-agent systems in **AgentSpeak** using *Jason*

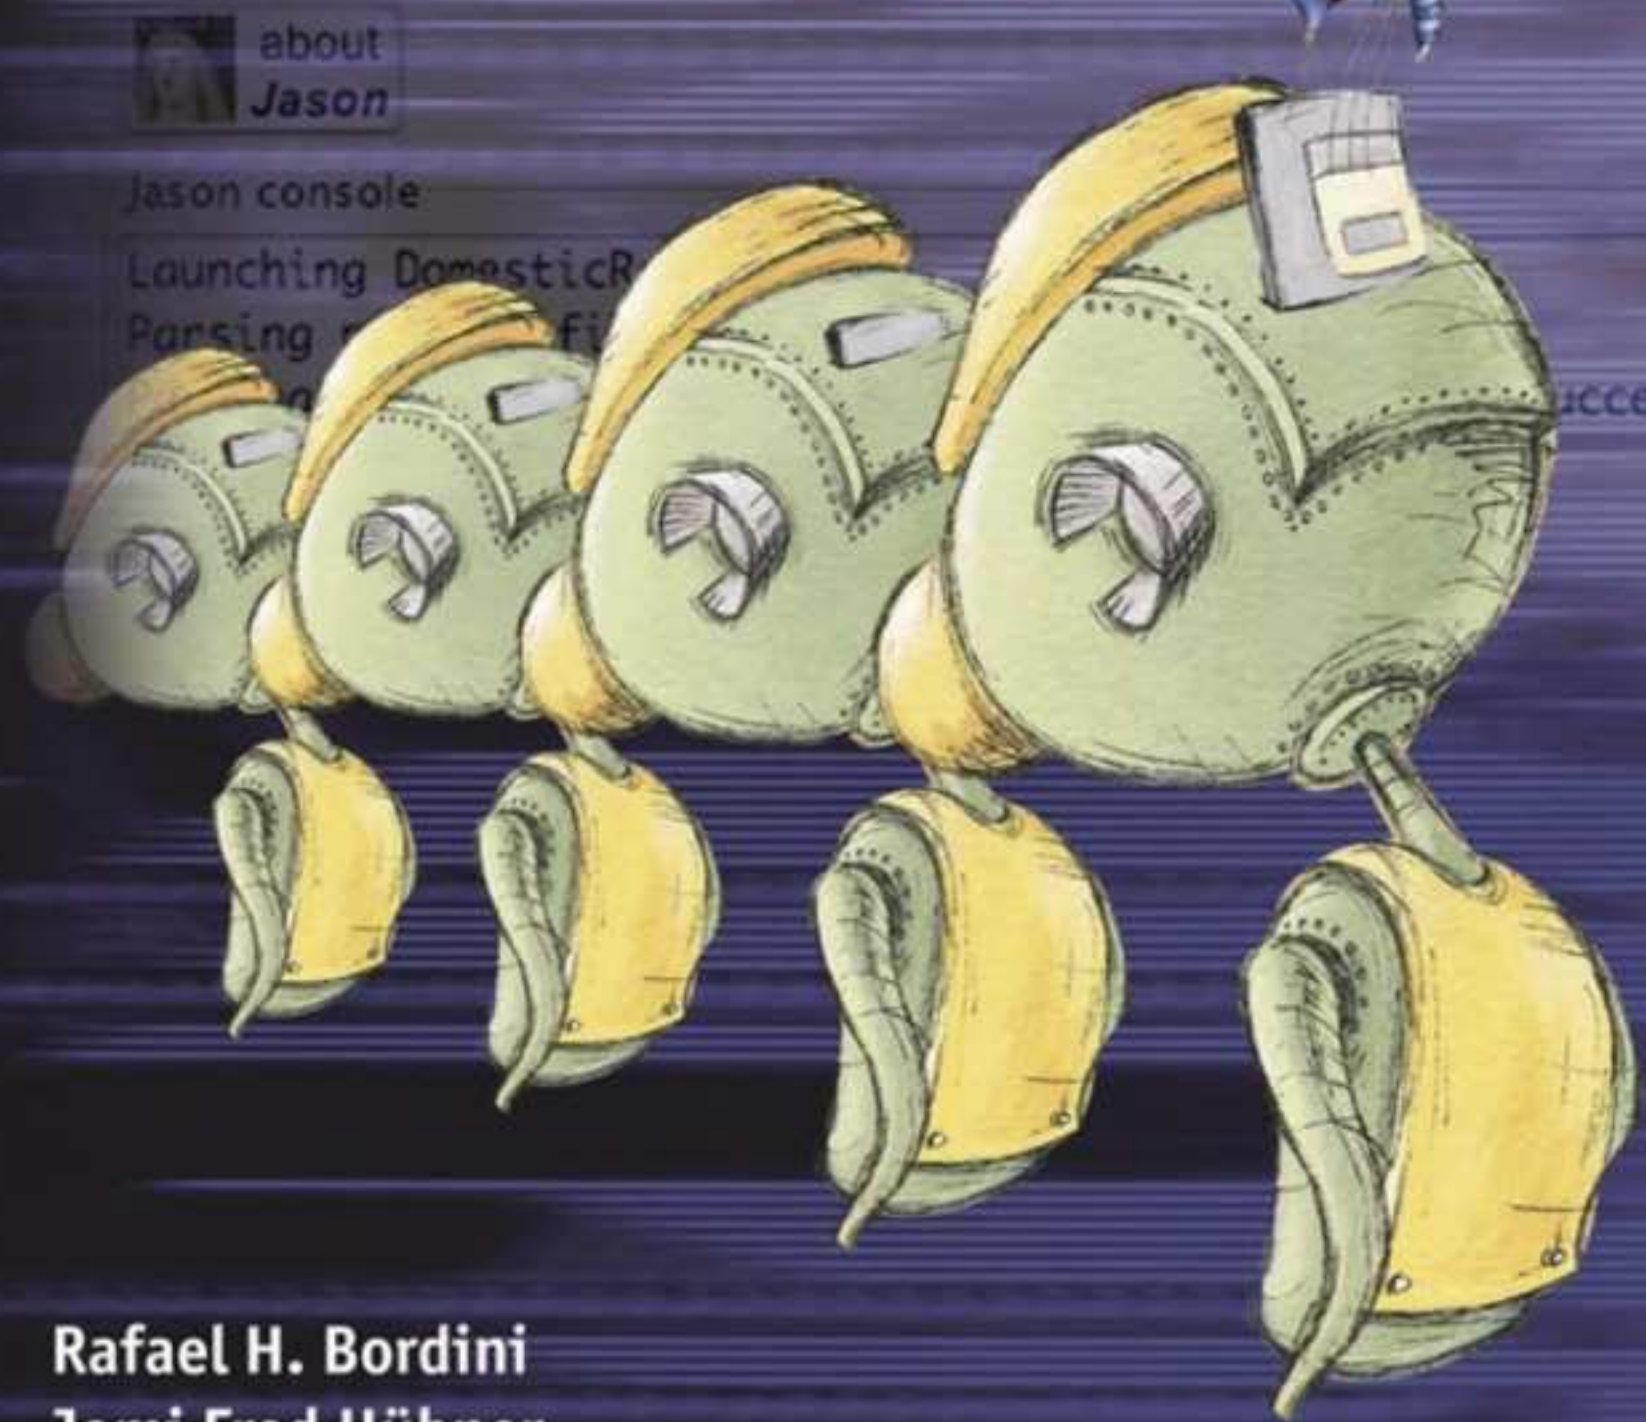

Rafael H. Bordini
Jomi Fred Hübner
Michael Wooldridge

From: <https://jason.sourceforge.net/wp/description>
One of the best known approaches to the development of cognitive agents is the BDI (Beliefs-Desires-Intentions) architecture. In the area of agent-oriented programming languages in particular,

AgentSpeak has been one of the most influential abstract languages based on the BDI architecture. The type of agents programmed with AgentSpeak are sometimes referred to as reactive planning systems.

To the best of our knowledge, Jason is the first fully-fledged interpreter for a much improved version of AgentSpeak, including also speech-act based inter-agent communication.

Using Saci (for example), a Jason multi-agent system can be distributed over a network effortlessly. Various ad hoc implementations of BDI systems exist,

but one important characteristic of AgentSpeak is its theoretical foundation: it is an implementation of the operational semantics, formally given to the AgentSpeak language and most of the extensions available in Jason.

We therefore have begun work providing SuperAGI with a marketplace toolkit that will enable a DSL for control flow and event loops, by exposing an AgentSpeak interface to it.

AgentSpeak therefore can provide a skeleton or backbone, upon which to rig the LLM-based autonomous agent.

This will serve to both constrain and guide the actions of the autonomous agents.

Integrating AgentSpeak w/ SuperAGI can be likened to creating a system with a co-processor.

We envision installing the AgentSpeak marketplace toolkit, which will then hook itself into the event loop / control flow of SuperAGI, and provide developers with extra capabilities.

Both developers and autonomous agents
can eventually generate and edit the
AgentSpeak programs.

Furthermore, AgentSpeak programs can
invoke and control all manner of LLM
behavior and API functions.

Here is some sample Jason/AgentSpeak(L)
code that was generated by GPT-4:

```
!evacuate(Person).
+!evacuate(Person) : true <-
    .print("Identify the safest evacuation route for ", Person);
    identify_route(Person, Route);!communicate_evacuation_plan(Pers
+!communicate_evacuation_plan(Person, Route) : true <-
    .print("Communicate the evacuation plan to ", Person);
    inform_person(Person, Route).
+!monitor_evacuation(Person) : true <-
    .print("Monitor the evacuation progress of ", Person);
    monitor_progress(Person).
+!provide_resources(Person) : true <-
    .print("Provide necessary resources to ", Person);
    provide_food(Person);
    provide_water(Person);
    provide_shelter(Person).
+!reassess_situation(Person) : true <-
    .print("Reassess the situation and provide further assistance t
    reassess(Person).
```

We made a somewhat unusual design choice: to enable the use of two AgentSpeak implementations simultaneously: python-agentspeak and Jason.


I figured that the python-agentspeak would have library functions necessary to cleanly discuss between Python and Java, and it adds some flexibility.

This might cause some confusion about which contexts are involved, although we intend to address that via naming conventions.


So, our SuperAGI<->Jason bridge uses:

- Jason/AgentSpeak(L)
 - Feature-complete
 - Jason is Programmed in Java
 - Reasons about AgentSpeak(L)
 - Uses a Prolog-like language
- python-agentspeak
 - Not feature-complete
 - Programmed in Python
 - Reasons about AgentSpeak(L)
 - Uses a Prolog-like language
- Py4J
 - Bridges from Python to Java
 - Connects our Python-based plugin with Jason

Recall the Earlier Early Control Flow:

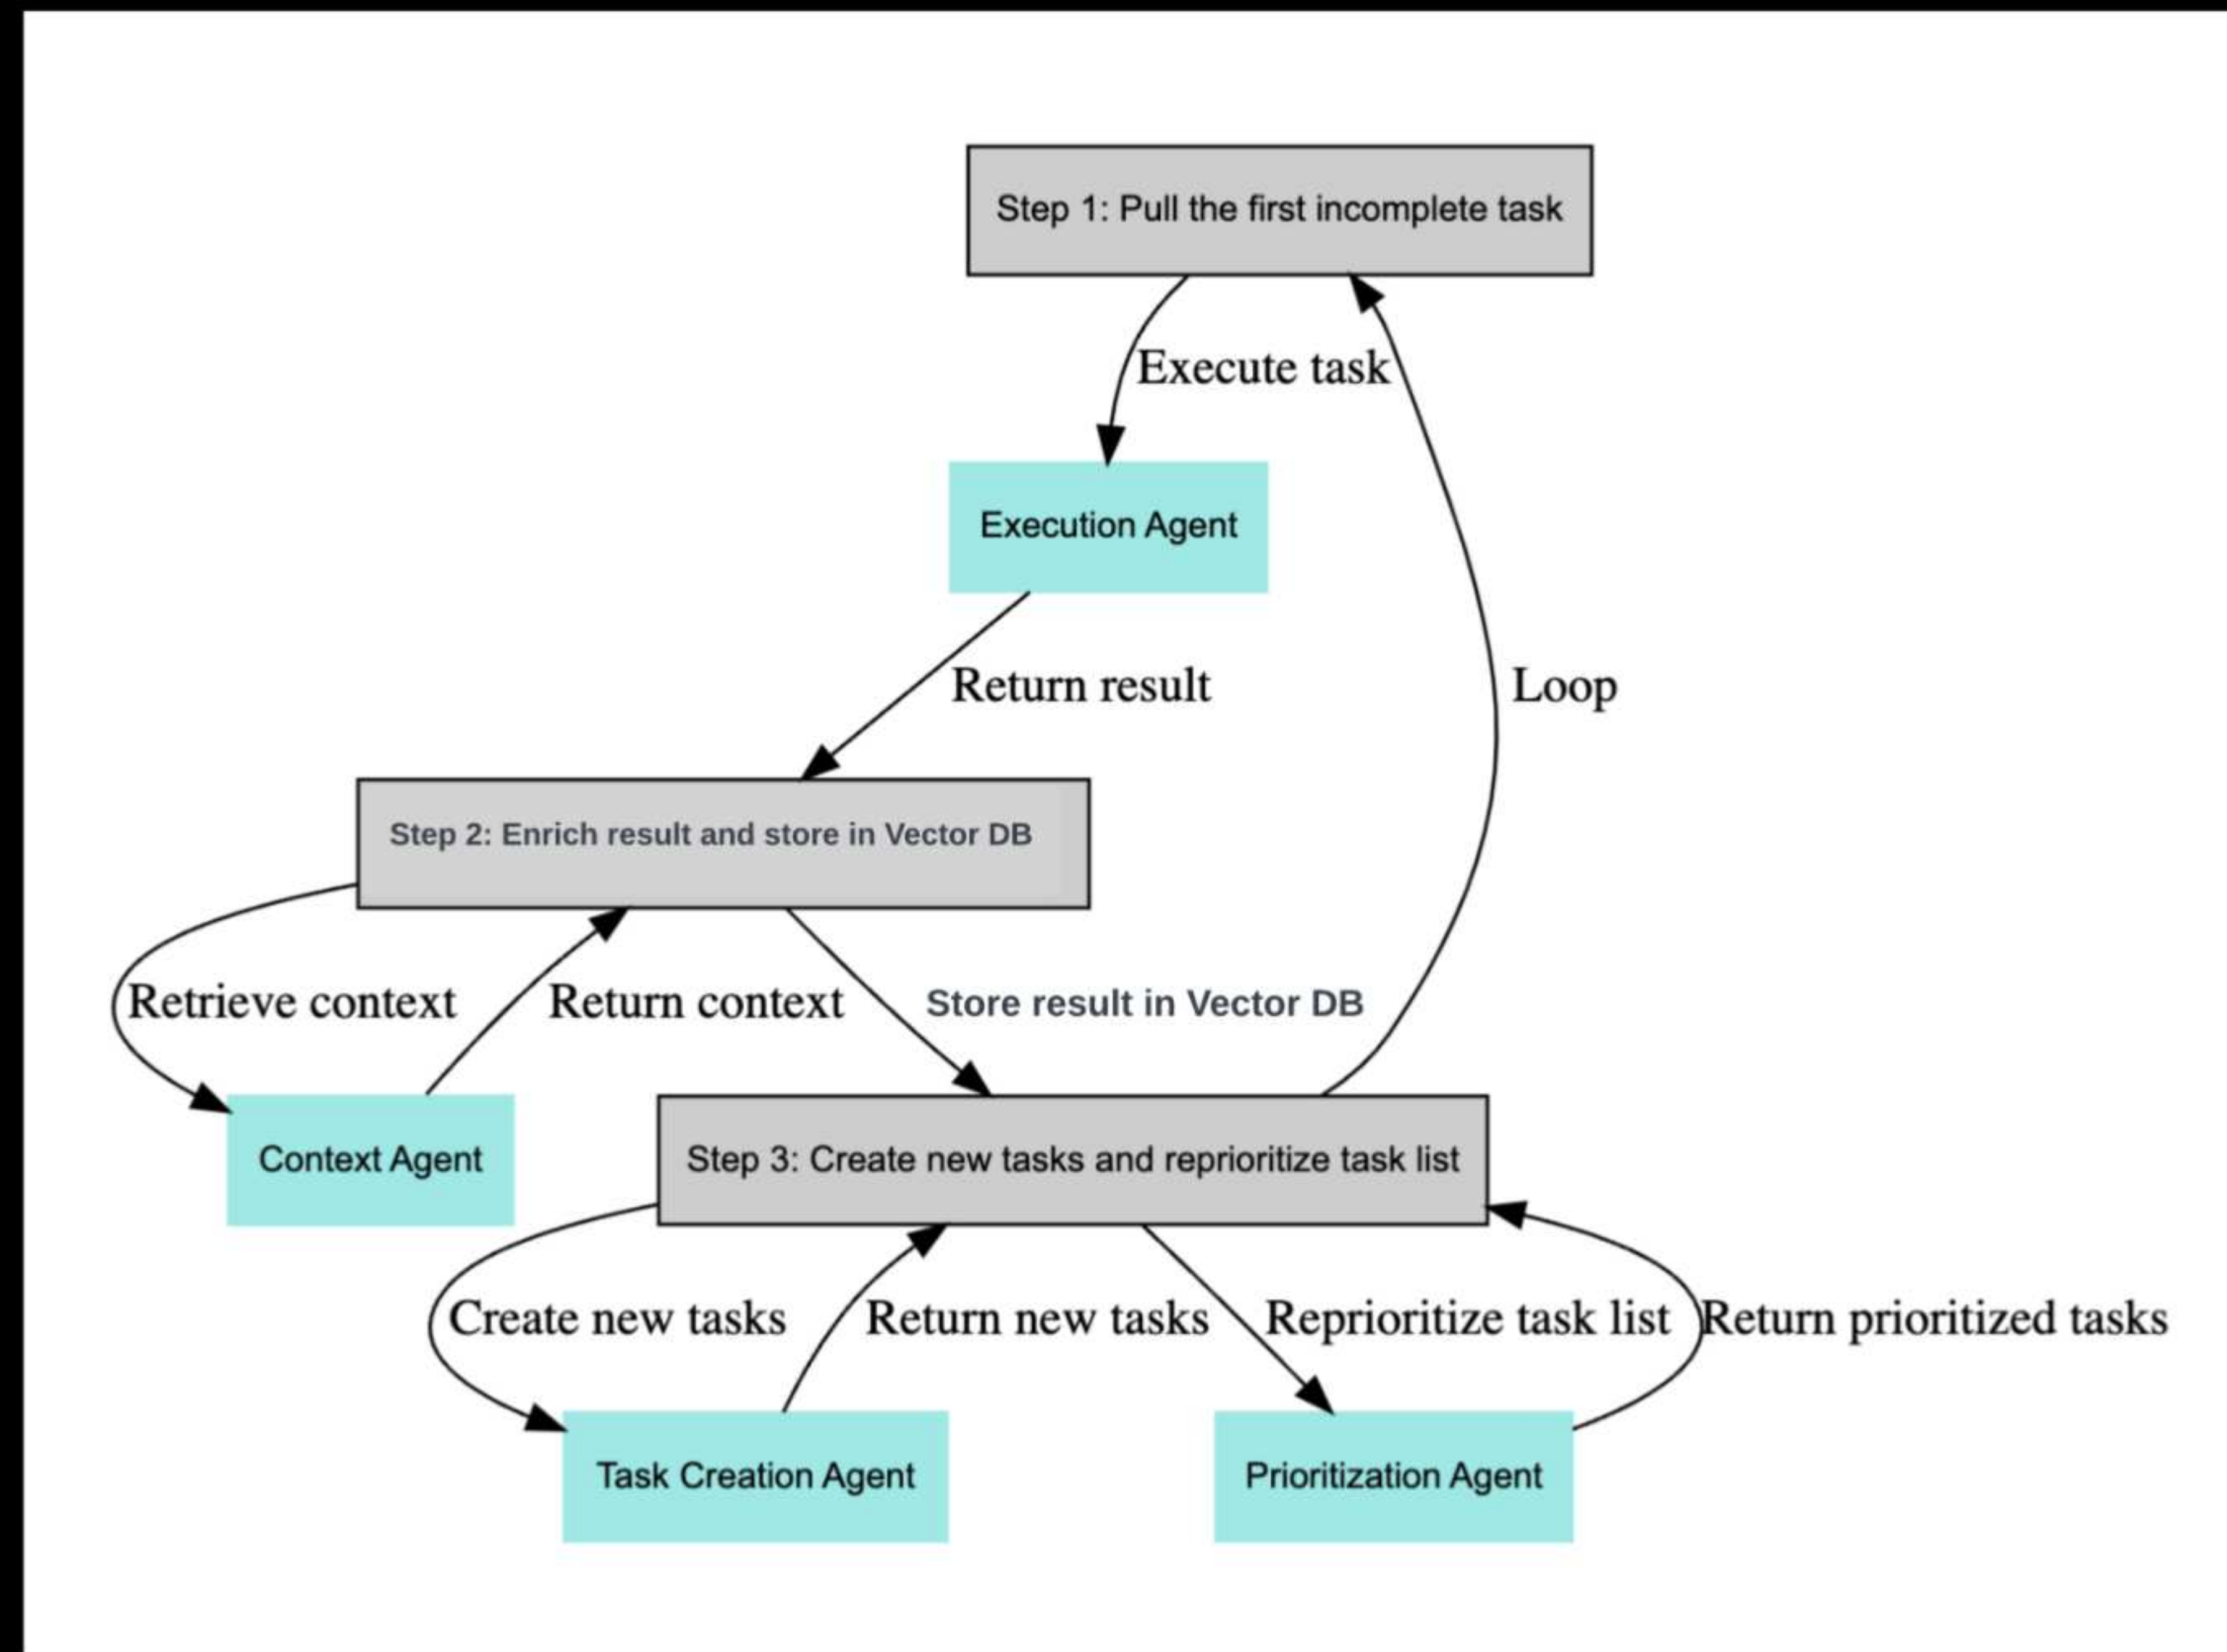

Jason/AgentSpeak(L) Event Loop:

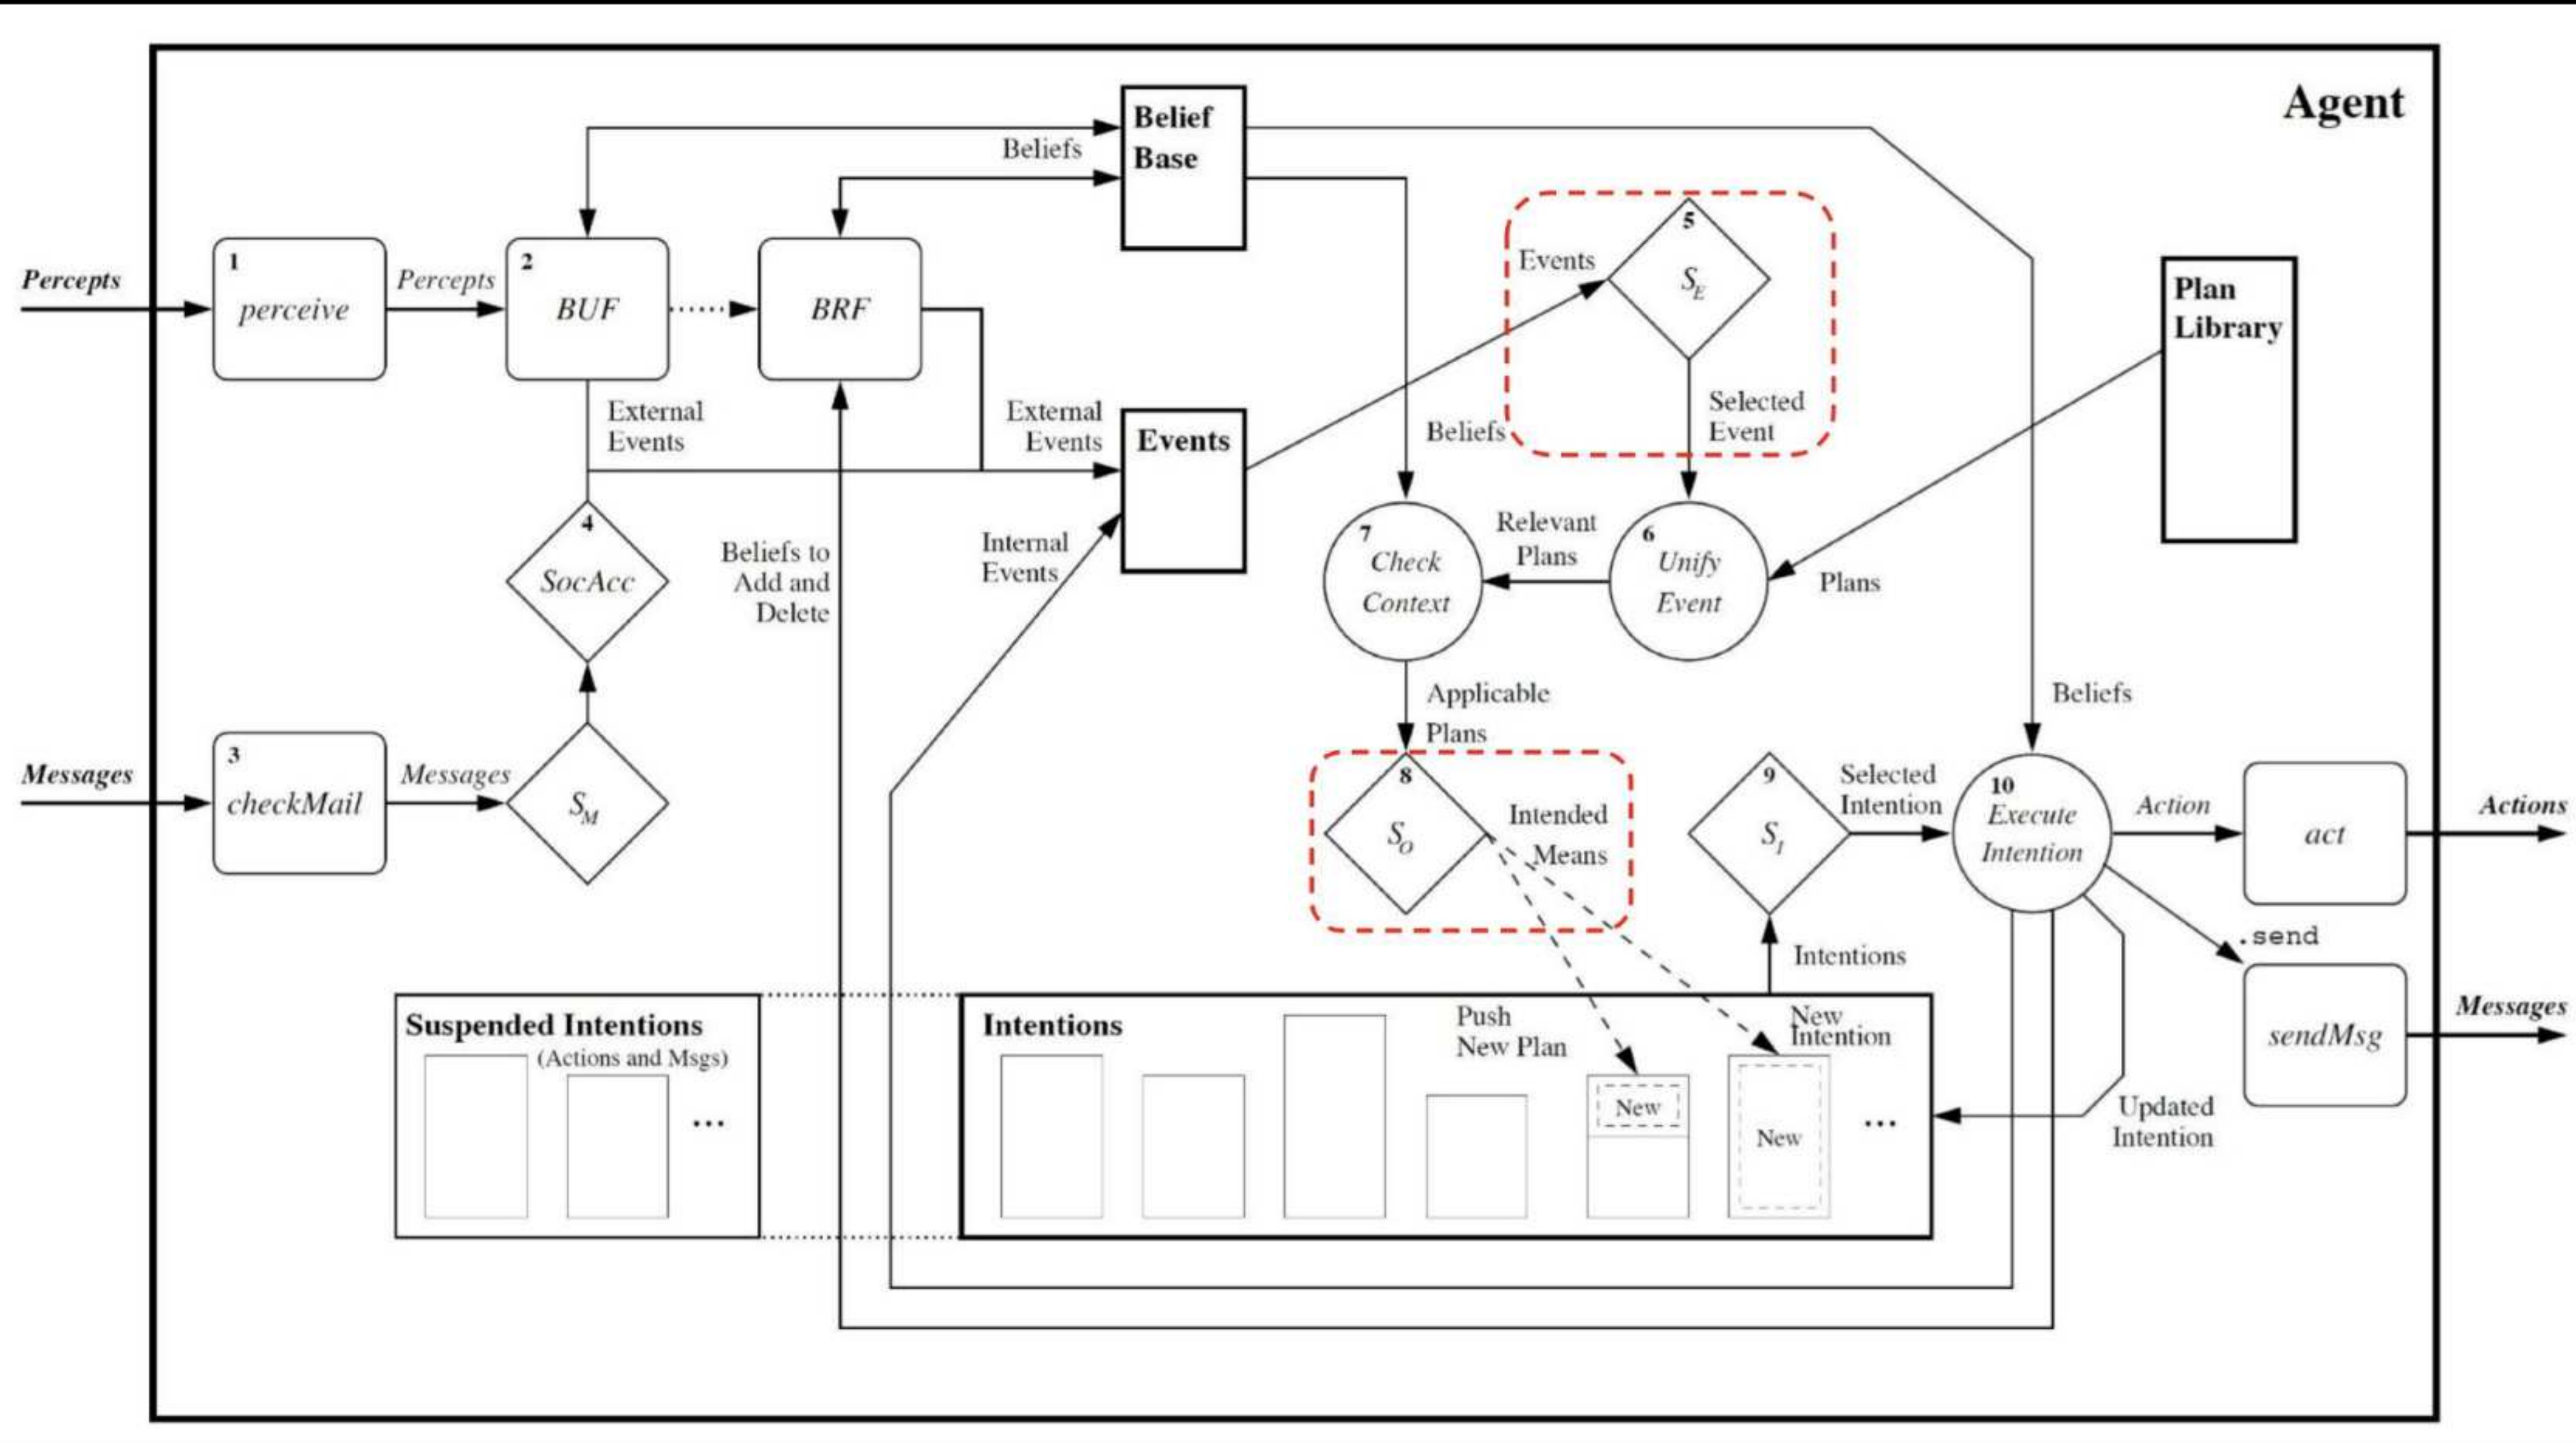

Simplified Jason/AgentSpeak(L) control-loop:

```
1: B ← B 0 ; PlanLib ← PlanLib 0 ; Ev ← {} ; I ← {}
2: loop
3:     ρ ← SENSE_ENV()
4:     BEL_UPDATE(ρ, B, Ev)
5:     if Ev is not empty then
6:         ev ← FETCH_EVENT(Ev)
7:         p ← SELECT_PLAN(ev, B, PlanLib)
8:         if ev is an env change or a new goal to achieve then
9:             I ← I ∪ {NEW_INT(p, ev)}
10:        else if ev is a sub-goal to achieve then
11:            PUSH_PLAN(currInt, p, ev)
12:        end if
13:    end if
14:    if I is not empty then
15:        currInt ← SELECT_INTENTION(I)
16:        a ← FETCH_NEXT_ACTION(currInt)
17:        EXEC_ACTION(a, currInt, B, I, PlanLib)
18:    end if
19: end loop
```

Next we show an example of a Python program running both python-agentspeak and Jason/AgentSpeak(L).

We will eventually insert code like this into the toolkit plugin.

We achieved Python<->Java integration using Py4J.

```
#!/usr/bin/env python
import agentspeak
import agentspeak.runtime
import agentspeak.stdlib
import os
import pprint
from py4j.java_gateway import JavaGateway, java_import
gateway = JavaGateway()
java_import(gateway.jvm, "py4j.examples.JavaAgentSpeakClient")
actions = agentspeak.Actions(agentspeak.stdlib.actions)
.add_function(".call_java_agentspeak", (int, ))
def call_java_agentspeak(x):
    stack = gateway.entry_point.getStack();
    pprint.pprint("Adding to stack: "+str(x));
    stack.push(str(x));
    return 1;
env = agentspeak.runtime.Environment()
with open(os.path.join(os.path.dirname(__file__), "agent.asl")) as source:
    agent = env.build_agent(source, actions)
if __name__ == "__main__":
    env.run_agent(agent)
```

```
!start.  
// +!start <-//      .custom_action(3, X);  
//      .print('X =', X);  
//      .print('I LOVE THIS!').  
+!start <-+goal(solveUserProblem(andrewDougherty,problem1),3).  
+goal(X,Y) <-  
      .call_java_agentspeak(Y,Z);  
      .print('I LOVE THIS!: ',X,Z).  
// +!call_language_model(Model
```


The next video is hard to follow:

- Shows our successful technology integration experiment
- We separately launch Jason and Python
- The Jason environment has code to startup the Java end of the Py4J bridge
- The Python script loads the python-agentspeak library
- Declares a python-agentspeak internal action `call_java_agentspeak/2`
- Proceeds to run the agent specified by `agent.asl`
- Agent defines a plan to add a belief goal/2
- A trigger for adding a belief which defines a plan to call the `call_java_agentspeak/2` with some args.
- The `call_java_agentspeak/2` internal action then uses Py4J to obtain the Java stack object
- The `call_java_agentspeak/2` proceeds to push its first argument onto the Java stack object

Must guard, guard, guard, guard, guard...
□

What kind of use-cases are enabled by this
new bridge between Python and
AgentSpeak?

The Free Life Planner (DRAFT - Do NOT Distribute!!): A Virtual Secondary Social Safety Net

1 / 21

75%

Through Jason, SuperAGI and the **FRDCSA**
and **Free Life Planner** systems can pass
messages to each other.

This is a massive force multiplier, as it
enables both to control each other.

However, we found setting up Py4J, given our lack of experience with either language, to be difficult and time consuming.

This is why we weren't able to get further along with the AgentSpeak Toolkit.

I still need to decouple **FLP**'s Jason<-
>SWIPL interface from the Python interface,
in order to have a public release.

However the code as is can be found here:

<https://github.com/aindilis/jason>

In particular, see:

- <https://github.com/aindilis/jason/tree/master/examples>
 - python-adapter
 - python-adapter/scripts
 - python-adapter/src/java

!THE_END.